SLIDE COLD

System drzwi przesuwnych wewnętrznych. Zastosowane profile nie posiadają izolacji termicznej. Wózki skrzydeł przesuwnych zamocowane są w dolnej ich części. W systemie tym istnieje możliwość stosowania ościeżnic dwutorowych (51/59 mm) lub trójtorowych (99/103.5 mm). Każda z ościeżnic występuje w dwóch wersjach: jest to wyprofilowany grzbiet, po którym toczą się wózki lub ościeżnica i dodatkowe szyny ze stali nierdzewnej. Występuje również odmiana jednotorowa przeznaczona dla drzwi, w których skrzydło rozsuwa się na ścianę. Możliwe do zastosowania grubości wypełnień 6-9 mm i 20-24 mm.

System for sliding windows without thermal break. This standard series of profiles without thermal break has the same form as the Slide series except for the thermal break.

Applications
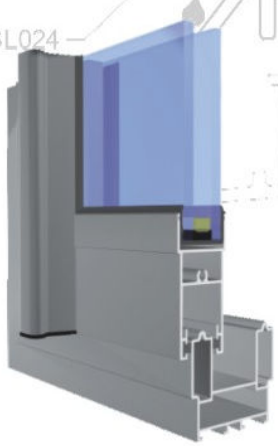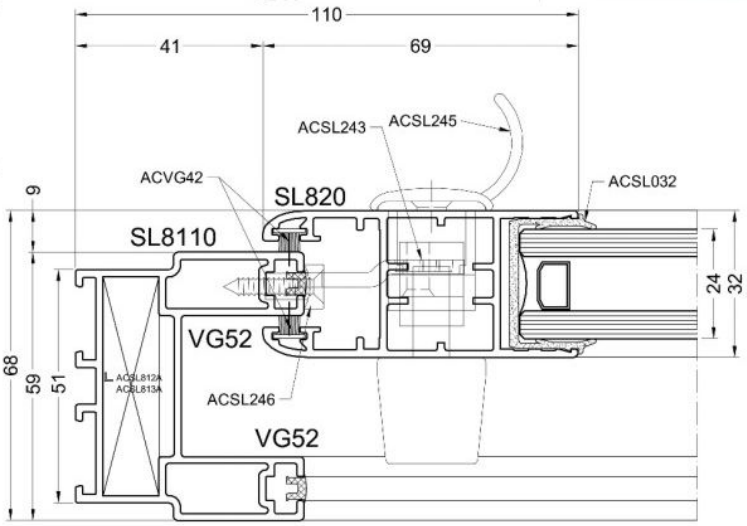
- for replacement of opening windows, where the rotating frame forms are a hindrance
- for dividing constructions as verandas, and for creating space from a large passage
- for dividing a terrace and a accommodation in houses and apartments